

## SKID MOUNTING

Custom designed carbon steel epoxy coated skis allow water treatment equipment to be firmly mounted, piped, wired, and hydro tested prior to shipping.

### STANDARD FEATURES

Epoxy Coated, Carbon Steel Skid Base

Galvanized Steel Piping

Pre-Wired using non-metallic liquid-tite flex conduit

Ubolts firmly secure equipment to base

Brine tank and brine line mounted

SCH 80 PVC drain line

Pressure Gauge and Test Taps installed

Controllers pre-programmed

Hydro-tested for 1 hr

Inlet and Outlet isolation valves installed

Bypass installed for each tank

Slots in skid for forklift tines

Single point electrical connection

Meters installed

### OPTIONAL FEATURES

Single, Twin, Triplex, Quad Equipment

Fiberglass or Steel Tanks

Stainless steel tank straps


PVC SCH80 Piping

Galvanized SCH40 Piping

304 / 316 Stainless Steel Piping

Steel plate support

Pipe supports for fiberglass tanks

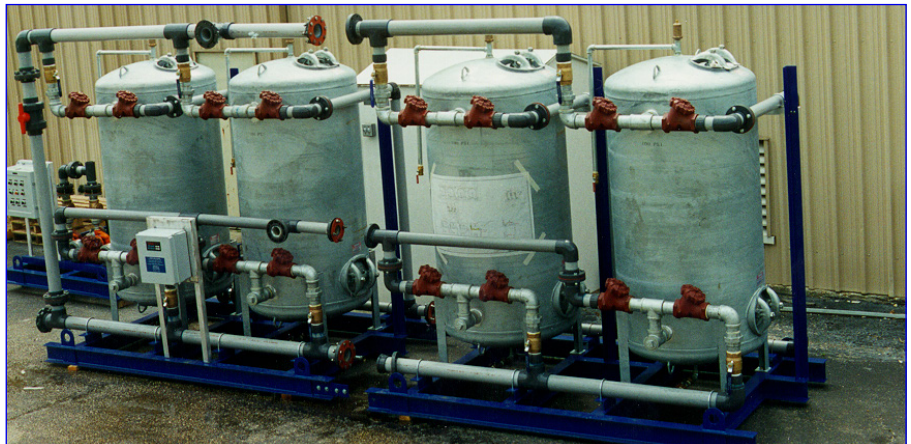

Fiberglass base/ Grating

Design for space restrictions

Brine tank separated from skid

Pipe rack design

Installation of Centurion/ Sentry control package

Mount, pre-pipe, and pre-wire multiple types of equipment in-line

RO Equipment skids available

Custom design to include pumps and chemical treatment

Large skids designed to disconnect for shipping and assembly on site

Made in USA





Pipe Rack Design shown with tanks

Pipe Rack Design shown without tanks